


- I** SCHEDA ELETTROSERRATURA
- GB** ELECTRIC LOCK BOARD
- F** CARTE SERRURE ÉLECTRIQUE
- D** DRUCKSCHALTUNG ELEKTROSCHLOSS
- E** FICHA ELECTROCERRADURA
- P** FICHA ELETROCERRADURA




www.DigiDsc.com

021-44929013


09123036082

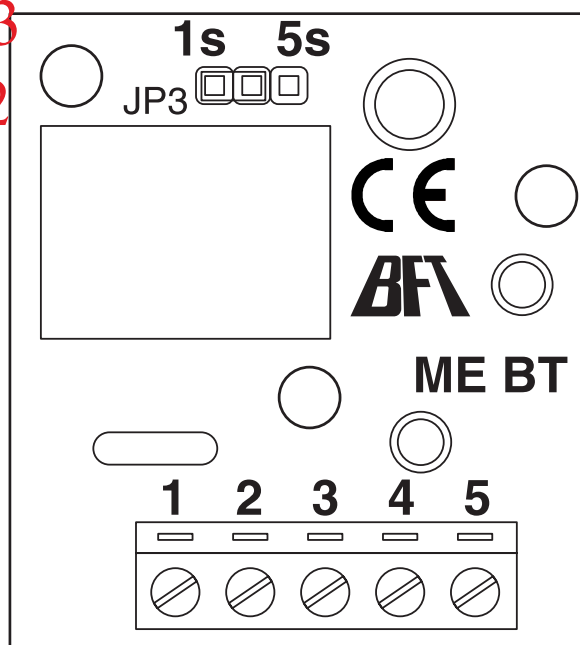

ISTRUZIONI D'USO E DI INSTALLAZIONE
INSTALLATION AND USER'S MANUAL
INSTRUCTIONS D'UTILISATION ET D'INSTALLATION
INSTALLATIONS-UND GEBRAUCHSANLEITUNG
INSTRUCCIONES DE USO Y DE INSTALACION
INSTRUÇÕES DE USO E DE INSTALAÇÃO



Via Lago di Vico, 44
 36015 Schio (VI)
 Tel.naz. 0445 696511
 Tel.int. +39 0445 696533
 Fax 0445 696522
 Internet: www.bft.it
 E-mail: sales@bft.it



ME BT

Alimentazione: 24Vac/dc
 Pilotaggio elettroserratura a scatto: 12V/24V
 Max portata contatto relè: 24V/5A

Power supply: 24Vac/dc
 Snap catch electric lock piloting: 12V/24V
 Max. relay contact capacity: 24V/5A


Alimentation: 24Vac/dc
 Pilotage serrure électrique à cliquet: 12V/24V
 Portée maxi contact relais: 24V/5A

Versorgungsspannung: 24Vac/dc
 Steuerung elektrisches Schnappschloß: 12V/24V
 Max Belastung Relaiskontakt: 24V/5A

Alimentacion: 24Vac/dc
 Salida electrocerradura (de pulsador y cilindro interior): 12V/24V
 Capacidad máxima contacto relé: 24V/5A

Alimentação: 24Vac/dc
 Pilotagem fechadura eléctrica de lingueta: 12V/24V
 Alcance máx. contacto relé: 24V/5A

D811433_02

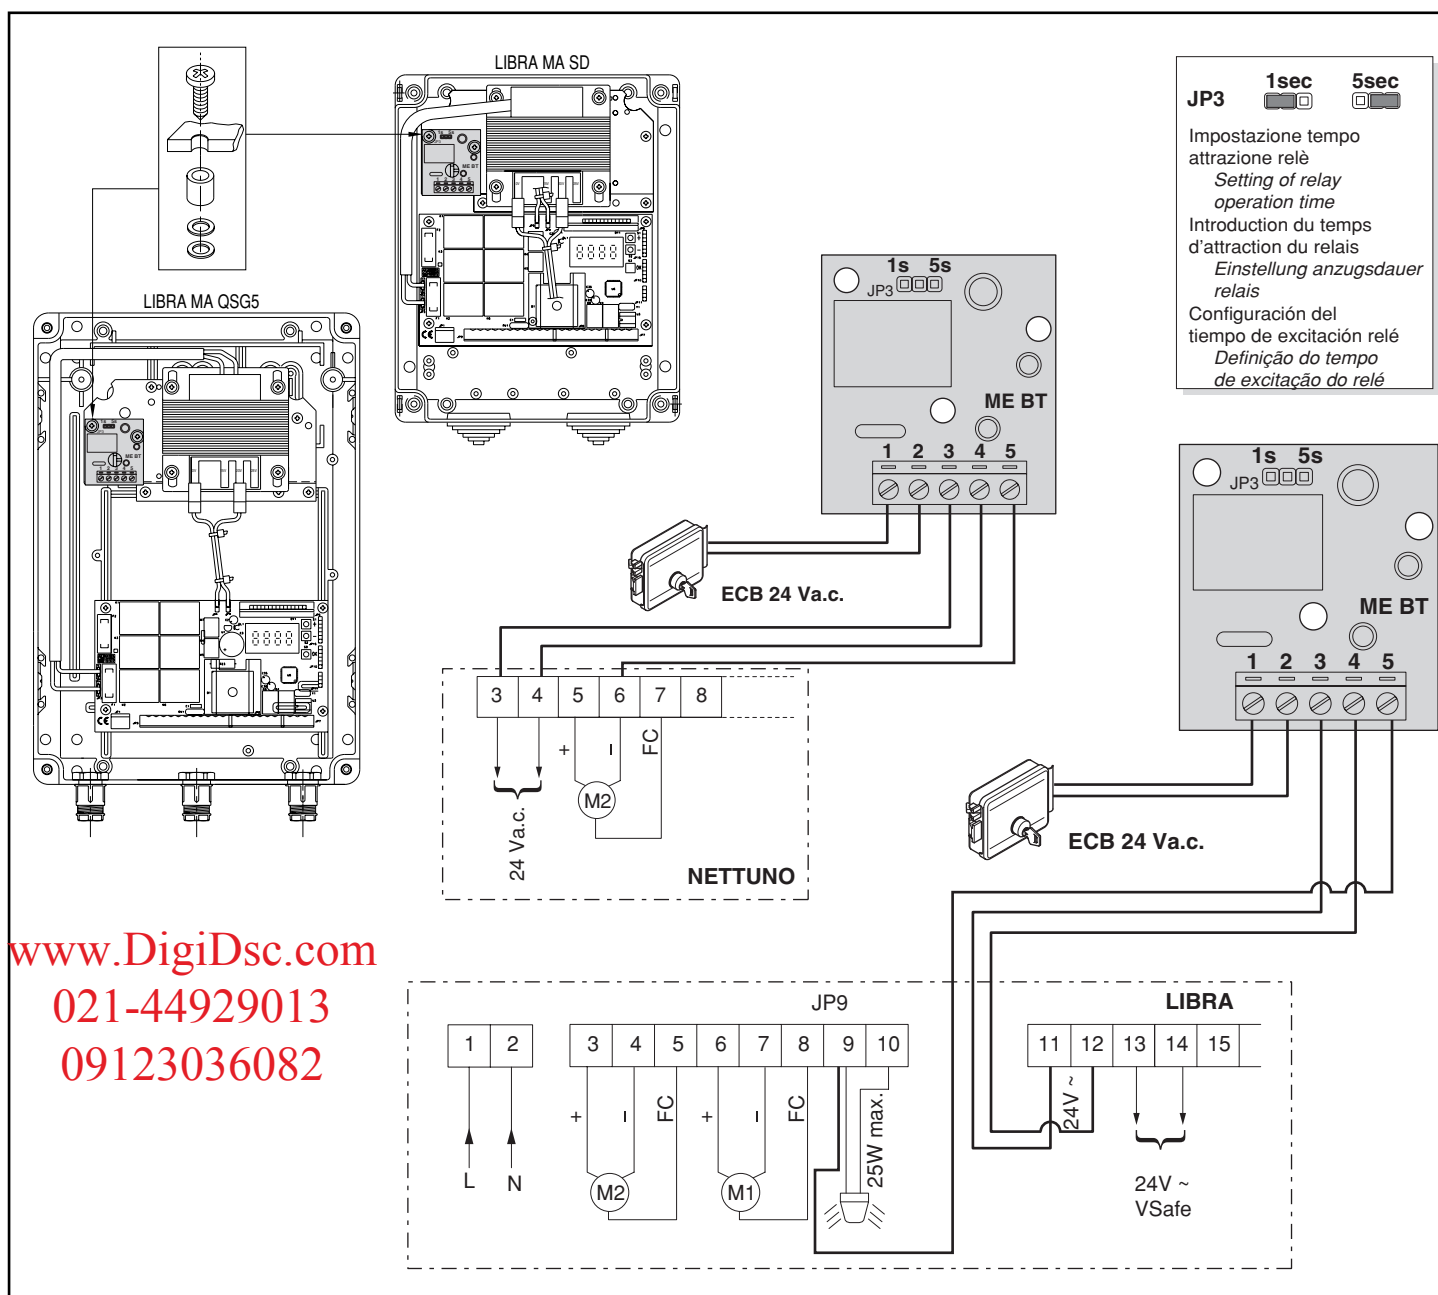

www.DigiDsc.com
 021-44929013
 09123036082

