

Nice

Sliding gates



The most complete and innovative
range to automate sliding gates.

www.DigiDsc.com

021-44929013

09123036082



Nice


Home Automation

Excellent reasons to choose Nice.
Simple and practical solutions
for any of automation.

www.DigiDsc.com

021-44929013

09123036082

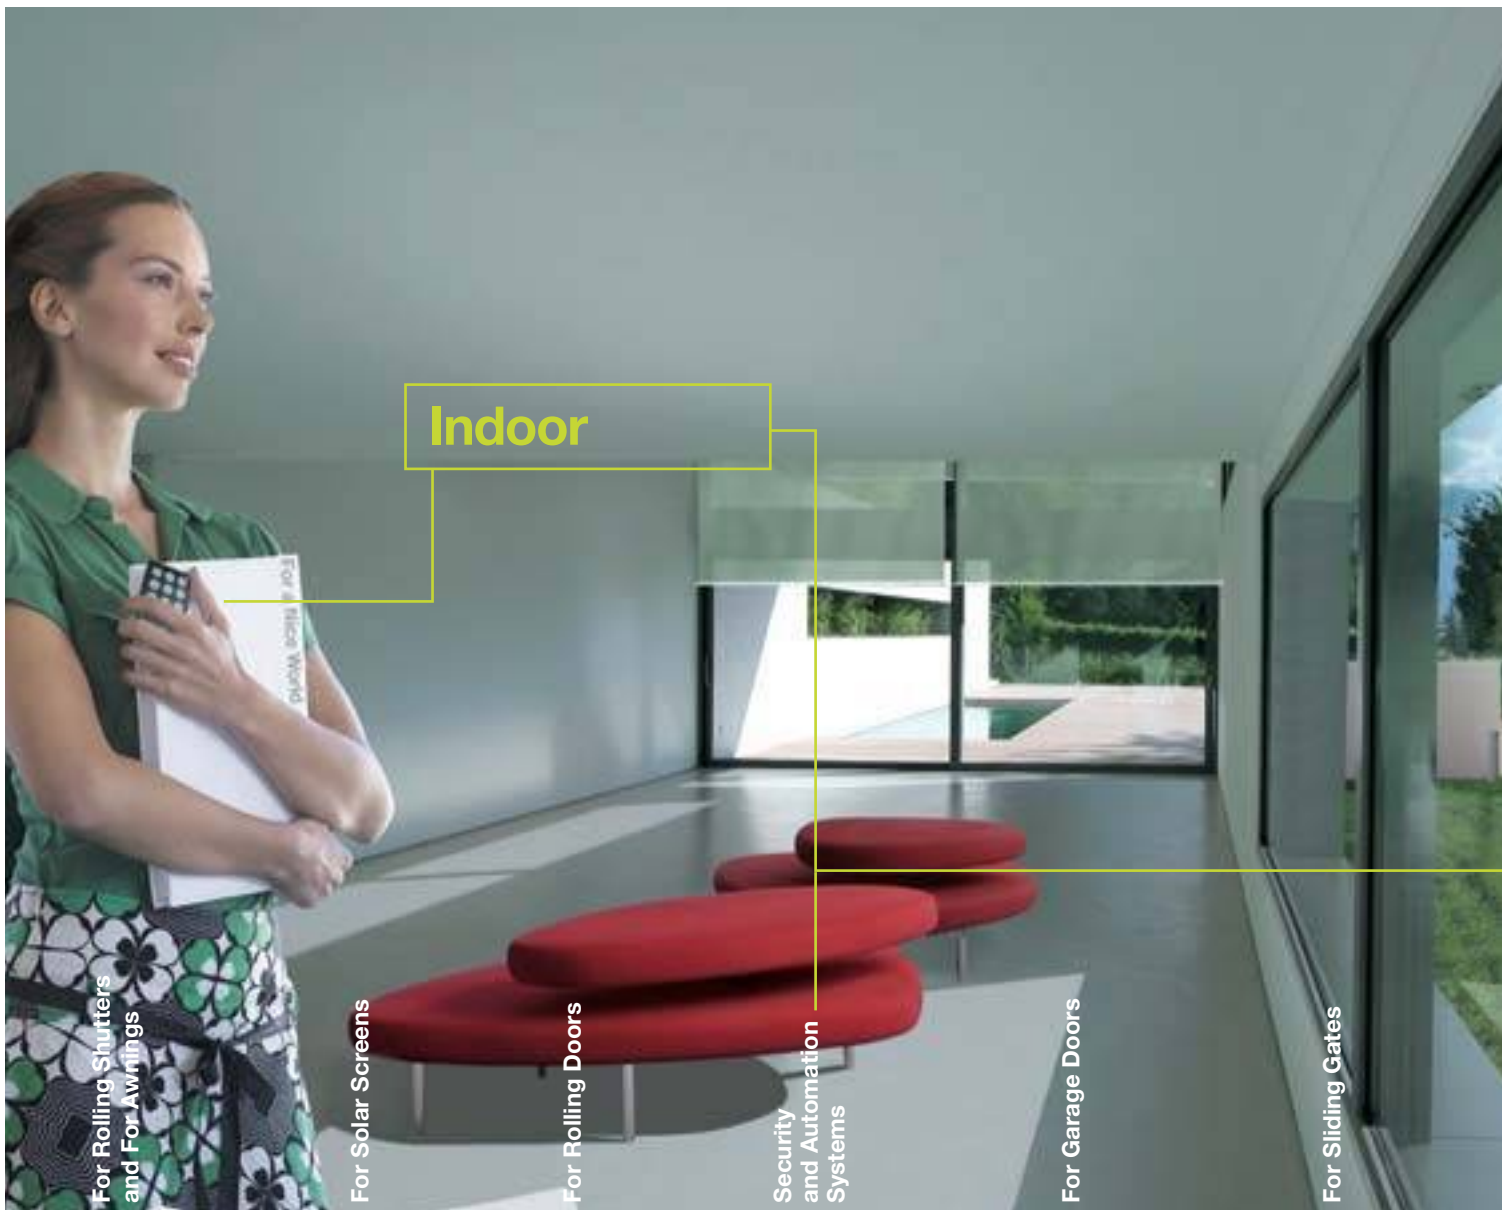

www.DigiDsc.com

021-44929013

09123036082



A comprehensive range and compatible systems.

Nice offers a comprehensive range of products: a wide range of systems and products for the automation of gates, garages, shutters, barriers, awnings, shutters and now also alarm systems. All products are compatible with one another and easily integrated with existing systems.

Design

Today, Nice products are exhibited in design and applied art museums, and were presented with an awards at the XIX Compasso d'Oro, the most important international event in the design field.



Increasingly innovative.

The NRC systems and Nice Solemyo make installation of all automations both simple and economic, in new and restored buildings alike. Opera and BlueBUS simplify the installation, the programming and use of each automation.



Solemyo is the kit for solar power for the automation of gates, garage doors and barrier gates.

Installable anywhere without the need for connections or excavations, even in the most remote locations or those difficult to access with the power mains.

Increased savings and respect for the environment thanks to solar energy, free and clean: an ecological and intelligent choice with short term benefits.



The NRC systems (Nice Radio Connection),

avoiding the cost effort of building work or the installation of unsightly ducting for routing control cables make the installation of any automation much simpler and economical, in new buildings, and all renovated constructions.



Opera marks the future of the automation.

The innovative system Nice Opera makes the work for the installer easier thanks to the remote control of any automation system via PC and PDA, while customers can manage home automation via Bluetooth, GSM or GPRS.



Easy and quick installations, just two wires without polarity!

With Nice's revolutionary BlueBUS system far fewer connections are required, which means incredible time savings: just two wires, which carry both the communication signals and the power supply! With BlueBUS you don't need to observe any polarity, therefore any related risk factor is eliminated.



SYKCE

The kit contains the photovoltaic panel **SYP** that converts sunlight into electricity and the battery box **PSY24** storing the electrical energy produced by the panel, with continuous and permanent supply throughout the day.

www.DigiDsc.com


021-44929013

09123036082


Nice Selection guide

Follow the arrow and choose the right product

For residential use, also available in kit

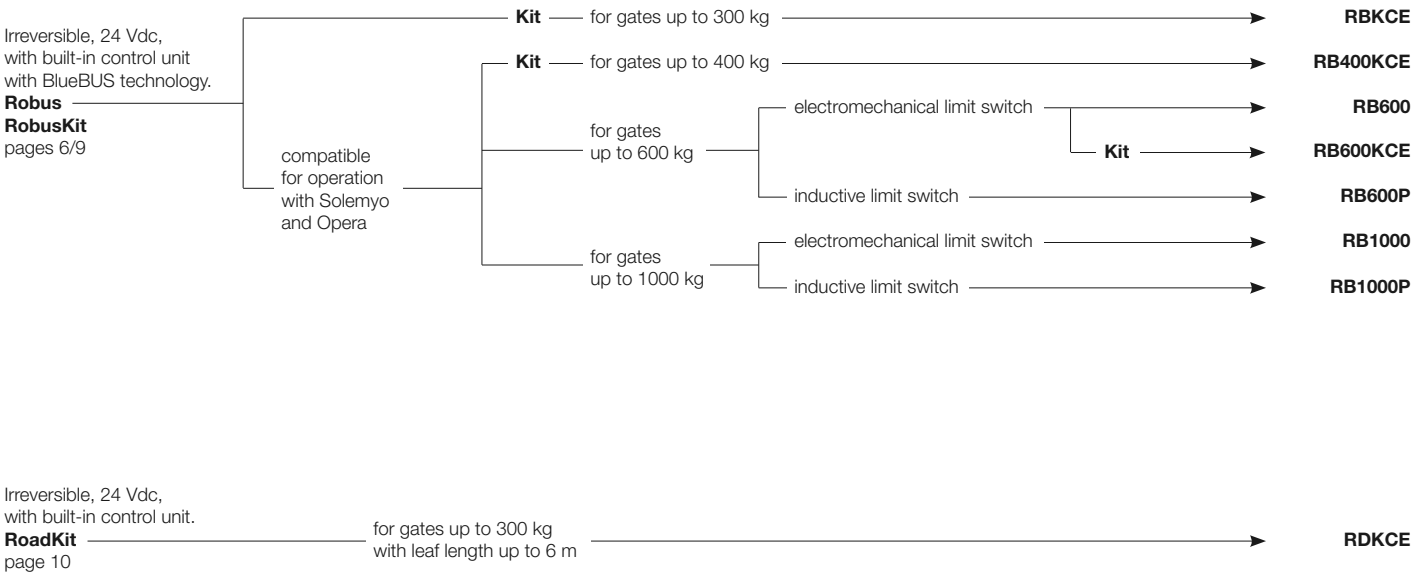

For residential and industrial use

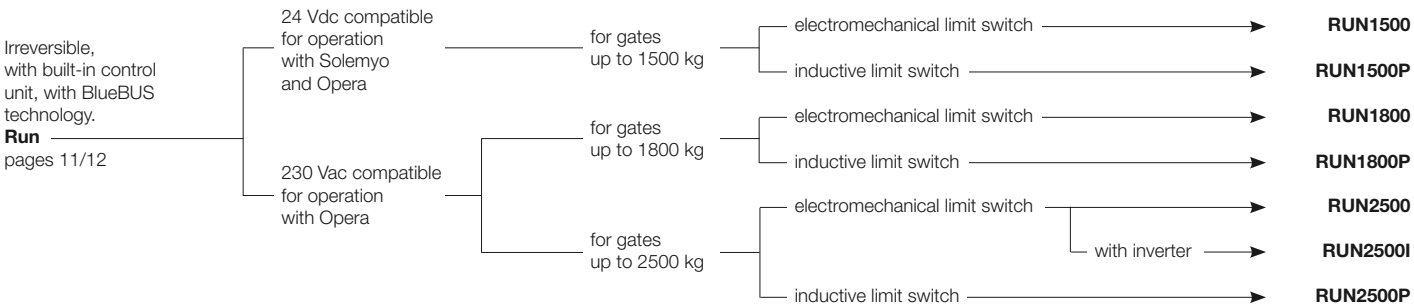


For industrial use



www.DigiDsc.com
021-44929013
09123036082

RB350

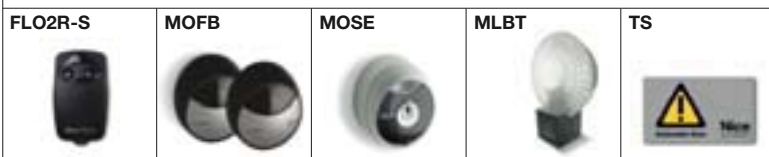

The kit contains:

RB350 1 irreversible electromechanical gear motor, with incorporated control unit and SMXI plug-in receiver which can be used for connections via Nice BlueBUS. **FLO2R-S** 1 transmitter 433.92 MHz, 2 channels. **MOFB** 1 couple of external photocells designed for connection by Nice BlueBUS. **MOSE** 1 key selector switch for outdoor installation. **MLBT** 1 flashing light with integrated aerial. **TS** 1 signboard.

Technical specifications

Code	RB350
Electrical data	
Power supply (Vac 50 Hz)	230
Absorption (A)	1.1
Power (W)	250
Built-in capacitor (µF)	-
Performance data	
Speed (m/s)	0.34
Force (N)	333
Work cycle (cycles/hour)	30
Dimensional and general data	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	330x195x277 h
Weight (kg)	8

For sliding gates weighing up to 350 kg, with Nice BlueBUS technology.

User-friendly: the Nice BlueBUS technology, enables to power and control a maximum of seven couples of photocells from the MoonBus series using two wires only.

Practical: the control unit and PS124 buffer battery (optional) can be connected by means of a simple connector and can be housed directly inside Robus.

Advanced: the speed, strength and pause can all be adjusted.


Intelligent: thanks to the obstacle detection system and automatic programming of the working times. Self-diagnosis by means of a flashing light.

Safe: acceleration and deceleration can be adjusted at the beginning and end of each opening and closing manoeuvre.

Sturdy: base and release in pressure die cast aluminium and epoxy paint finish.

Very quiet: gear motor on bearings.

Installation diagram

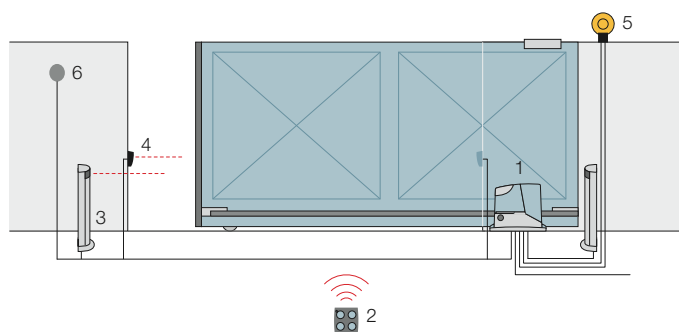

1. Robus 2. Transmitter 3. Photocells mounted on posts 4. Photocells 5. Flashing light 6. Key switches.

www.DigiDsc.com

021-44929013

09123036082

RB400



ON2

MOFB

MOSE

MLBT

TS


The kit contains:

RB400 1 irreversible electromechanical gear motor, with incorporated control unit and OXI plug-in receiver which can be used for connections via Nice BlueBUS. **ON2** 1 transmitter 433.92 MHz, 2 channels. **MOFB** 1 couple of external photocells designed for connection by Nice BlueBUS. **MOSE** 1 key selector switch for outdoor installation. **MLBT** 1 flashing light with integrated aerial. **TS** 1 signboard.

Technical specifications

Code	RB400
Electrical data	
Power supply (Vac 50 Hz)	230
Absorption (A)	1.1
Power (W)	250
Built-in capacitor (µF)	-
Performance data	
Speed (m/s)	0.34
Force (N)	400
Work cycle (cycles/hour)	35
Dimensional and general data	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	330x195x277 h
Weight (kg)	8

Installation diagram

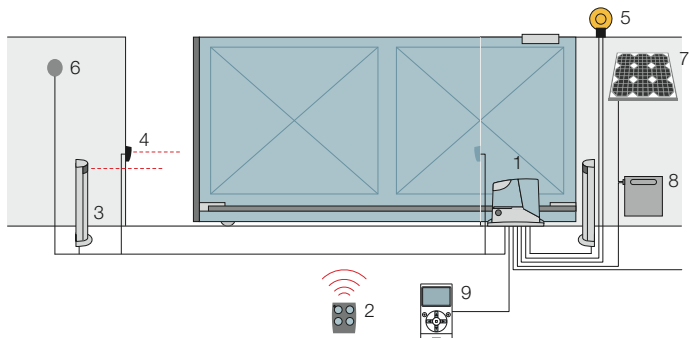

1. Robus 2. Transmitter 3. Photocells mounted on posts 4. Photocells 5. Flashing light 6. Digital or key switches 7. SYP* solar panel 8. PSY24* battery box 9. O-View* multifunction display.

*Optional connection to Solemyo and Opera systems.

For sliding gates weighing up to 400 kg, with Nice BlueBUS technology.

Compatible for operation with Solemyo and Opera systems.

User-friendly: the Nice BlueBUS technology, enables to power and control a maximum of seven couples of photocells from the MoonBus series using two wires only.

Practical: the control unit and PS124 buffer battery (optional) can be connected by means of a simple connector and can be housed directly inside Robus.

Advanced: RB400 is equipped with a temperature sensor: adapt the motor power to the climatic conditions and at the same time thermal cut-out. A master/slave selection automatically synchronises two motors. This means it is possible to automate 2-leaf sliding gates set opposite each other.

Intelligent: thanks to the obstacle detection system and automatic programming of the working times. Self-diagnosis by means of a flashing light. 8 programming levels.

Safe: acceleration and deceleration can be adjusted at the beginning and end of each opening and closing manoeuvre.

Sturdy: base and release in pressure die cast aluminium and epoxy paint finish.

Very quiet: gear motor on bearings.

www.DigiDsc.com
021-44929013
09123036082

RB600



ON2

MOFB

MOSE

MLBT

TS

The kit contains:

RB600 1 irreversible electromechanical gear motor, with incorporated control unit and OXI plug-in receiver which can be used for connections via Nice BlueBUS. **ON2** 1 transmitter 433.92 MHz, 2 channels. **MOFB** 1 couple of external photocells designed for connection by Nice BlueBUS. **MOSE** 1 key selector switch for outdoor installation. **MLBT** 1 flashing light with integrated aerial. **TS** 1 signboard.

For sliding gates weighing up to 600 kg, with Nice BlueBUS technology.

Compatible for operation with Solemyo and Opera systems.

User-friendly: the Nice BlueBUS technology, enables to power and control a maximum of seven couples of photocells from the MoonBus series using two wires only.

Practical: the control unit and PS124 buffer battery (optional) can be connected by means of a simple connector and can be housed directly inside the motor.

Advanced: RB600 is equipped with a temperature sensor: adapt the motor power to the climatic conditions and at the same time thermal cut-out; a master/slave selection automatically synchronises two motors. This means it is possible to automate 2-leaf sliding gates set opposite each other.

Intelligent: thanks to the obstacle detection system and automatic programming of the working times. Self-diagnosis by means of a flashing light. 8 programming levels.

Safe: acceleration and deceleration can be adjusted at the beginning and end of each opening and closing manoeuvre.


Sturdy: base and release in pressure die cast with easy to open handle.

Very quiet: gear motor on bearings.

Technical specifications

Code	RB600
Electrical data	
Power supply (Vac 50 Hz)	230
Absorption (A)	2.5
Power (W)	515
Built-in capacitor (µF)	-
Performance data	
Speed (m/s)	0.31
Force (N)	600
Work cycle (cycles/hour)	40
Dimensional and general data	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	330x210x303h
Weight (kg)	11

Installation diagram

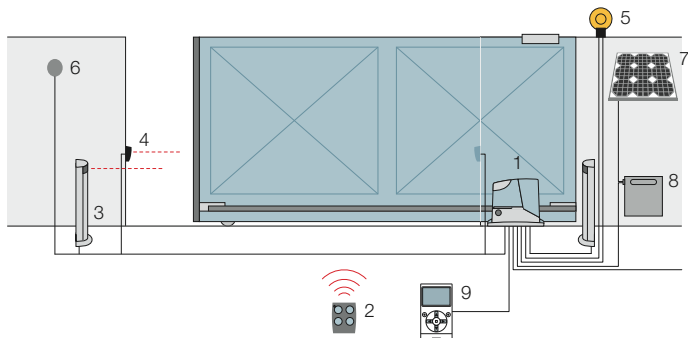

1. Robus 2. Transmitter 3. Photocells mounted on posts 4. Photocells 5. Flashing light 6. Digital or key switches 7. SYP* solar panel 8. PSY24* battery box 9. O-View* multifunction display.

*Optional connection to Solemyo and Opera systems.

www.DigiDsc.com
021-44929013
09123036082



For sliding gates weighing
up to 600 kg (RB600)
and up to 1000 kg (RB1000).
Electromechanical gear motor
with Nice BlueBUS technology.
Versions with electromechanical
limit switch (RB600/RB1000)
and with inductive limit switch
(RB600P/RB1000P).

Compatible for operation with Solemyo
and Opera systems.

User-friendly: the Nice BlueBUS technology,
enables to power and control a maximum
of seven couples of photocells from the
MoonBus series using two wires only.

Practical: the control unit and PS124
buffer battery (optional) can be connected
by means of a simple connector
and can be housed directly inside the motor.

Advanced: RB600 and 1000 are equipped
with a temperature sensor: adapt the motor
power to the climatic conditions and
at the same time thermal cut-out.
A master/slave selection automatically
synchronises two motors.
This means it is possible to automate 2-leaf
sliding gates set opposite each other.

Intelligent: thanks to the obstacle
detection system and automatic
programming of the working times.
Self-diagnosis by means of a flashing light.
8 programming levels.

Safe: acceleration and deceleration
can be adjusted at the beginning and end
of each opening and closing manoeuvre.


Sturdy: base and release in pressure
die cast with easy to open handle.

Very quiet: gear motor on bearings.

Technical specifications

Code	RB600/600P		RB1000/1000P	
Electrical data				
Power supply (Vac 50 Hz)	230			
Absorption (A)	2.5		2.3	
Power (W)	515		450	
Built-in capacitor (µF)	-			
Performance data				
Speed (m/s)	0.31		0.28	
Force (N)	600		900	
Work cycle (cycles/hour)	40		50	
Dimensional and general data				
Protection level (IP)	44			
Working temp. (°C Min/Max)	-20 ÷ +50			
Dimensions (mm)	330x210x303 h			
Weight (kg)	11		13	

Installation diagram

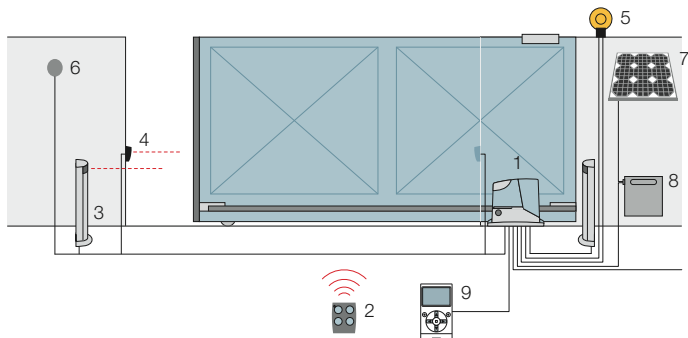

1. Robus 2. Transmitter 3. Photocells mounted on posts 4. Photocells 5. Flashing light
6. Digital or key switches 7. SYP* solar panel 8. PSY24* battery box 9. O-View* multifunction display.

*Optional connection to Solemyo and Opera systems.

www.DigiDsc.com
021-44929013
09123036082

RD300



FLO2R-S

MOF

MOSE

MLBT

TS

The kit contains:

RD300 1 irreversible electromechanical gear motor, 24 Vdc, with incorporated control unit and receiver.
FLO2R-S 1 transmitter 433.92 MHz, 2 channels. **MOF** 1 pair of photocells for outdoor installation.
MOSE 1 key selector switch for outdoor installation. **MLBT** 1 flashing light with integrated aerial. **TS** 1 signboard.

For sliding gates weighing up to 300 kg and up to 6 m length.

Practical: built-in control unit, can be connected by means of a simple connector and can be housed directly inside the motor; incorporated radio card, compatible with the Nice Flo and Smilo systems: 150 transmitters can be entered!

Advanced: the speed, strength and pause can all be adjusted.


Intelligent: thanks to the obstacle detection system and automatic programming of the working times. Self-diagnosis by means of a flashing light.

Safe: acceleration and deceleration can be adjusted at the beginning and end of each opening and closing manoeuvre.

Technical specifications

Code	RD300
Electrical data	
Power supply (Vac 50 Hz)	230
Absorption (A)	1.1
Power (W)	210
Built-in capacitor (µF)	-
Performance data	
Speed (m/s)	0.25
Force (N)	300
Work cycle (cycles/hour)	20
Dimensional and general data	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	330x195x277 h
Weight (kg)	8

Installation diagram

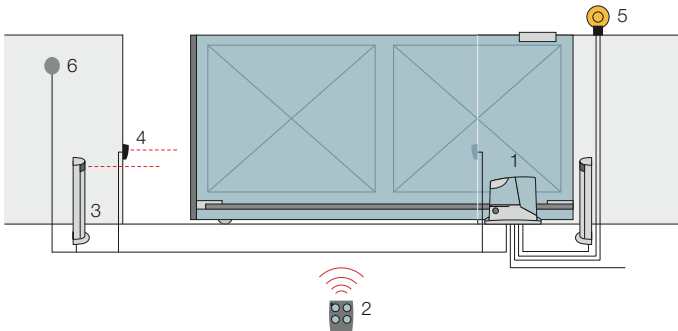

www.DigiDsc.com
021-44929013
09123036082

1. Road 2. Transmitter 3. Photocells mounted on posts 4. Photocells 5. Flashing light 6. Digital or key switches.



For sliding gates weighing up to 1500 kg.
Electromechanical gear motor with Nice BlueBUS technology.
Versions with electromechanical limit switch (RUN1500) and with inductive limit switch (RUN1500P).

Compatible for operation with Solemyo and Opera systems.

User-friendly: the BlueBUS technology, enables to power and control a maximum of 7 couples of photocells from the MoonBus series using two wires only.

Practical: the control unit and PS124 buffer battery (optional) can be connected by means of a simple connector and can be housed directly inside the motor.

Advanced: the temperature sensor adapts the motor force to weather conditions, setting the thermal cut-out protection accordingly; a master/slave selection automatically synchronises 2 motors, enabling the automation of sliding gates with two opposing leaves.

Intelligent: thanks to the obstacle detection system and automatic programming of the working times. Self-diagnosis by means of a flashing light. 8 programming levels.

Safe: acceleration and deceleration can be adjusted at the beginning and end of each opening and closing manoeuvre.


Sturdy: aluminium release handle for easy opening.

Very quiet: gear motor on bearings.

Technical specifications

Code	RUN1500/1500P
Electrical data	
Power supply (Vac 50 Hz)	230
Absorption (A)	2
Power (W)	400
Built-in capacitor (µF)	-
Performance data	
Speed (m/s)	0.25
Force (N)	1000
Work cycle (cycles/hour)	60
Dimensional and general data	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	400x255x390 h
Weight (kg)	19

Installation diagram

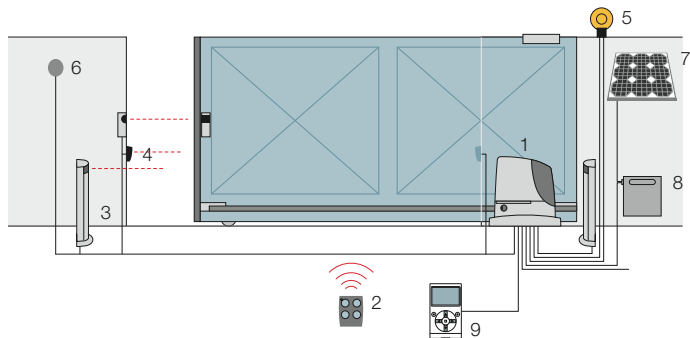

1. Run 2. Transmitter 3. Photocells mounted on posts 4. Photocells 5. Flashing light
6. Digital or key switches 7. SYP* solar panel 8. PSY24* battery box 9. O-View* multifunction display.

*Optional connection to Solemyo and Opera systems.

www.DigiDsc.com
021-44929013
09123036082



For sliding gates weighing up to 1800 kg (RUN1800) and up to 2500 kg (RUN2500), with Nice BlueBUS technology. Ventilated motor with inductive limit switch (RUN1800P/RUN2500P) or electromechanical limit switch (RUN1800/RUN2500/RUN2500I). Suitable to operate in extreme conditions, in systems for intensive use.

Compatible for operation with Opera system.

Simple to install: the BlueBUS system enables connections by means of just two wires between the control unit and up to 15 control safety and signalling devices.

Safe: the acceleration settings (at the start of the manoeuvre) and the deceleration settings (at the end of the manoeuvre) are precise and reliable.

The temperature sensor: Run is able to manage force, adapting it to the different climatic and environmental conditions, while adapting the thermal cut-out protection and intensity of self-ventilation, depending on the temperature reading.

A master/slave selection also automatically synchronises 2 motors, enabling the automation of sliding gates with two opposing leaves.

Practical and functional: the control unit (and inverter on version RUN2500I), housed inside Run, can be simply connected by means of the practical connector guide.

Very quiet: gear motor on bearings.


New version RUN2500I with built-in inverter

Perfect movement: the inverter enables the power supply and drive of the 3-phase motor with single-phase current at 230 Vac, acting on the frequency to adjust speed of the automation from a minimum of 8.2 m/min to maximum 15.4 m/min. In the automation deceleration phase, the inverter, which dialogues with the control unit, increases the torque, thus improving performance and reducing the risk of the automation blocking on impact with obstacles.

Technical specifications

Code	RUN1800/1800P	RUN2500/2500P	RUN2500I
Electrical data			
Power supply (Vac 50 Hz)		230	
Absorption (A)	3	3.8	3.7
Power (W)	700	870	650
Built-in capacitor (µF)		14	
Performance data			
Speed (m/s)		0.17	0.26
Force (N)	1110	1390	1660
Work cycle (cycles/hour)		42	28
Dimensional and general data			
Protection level (IP)		44	
Working temp. (°C Min/Max)		-20 ÷ +50	
Dimensions (mm)		400x255x390 h	
Weight (kg)	24.5		25

Installation diagram

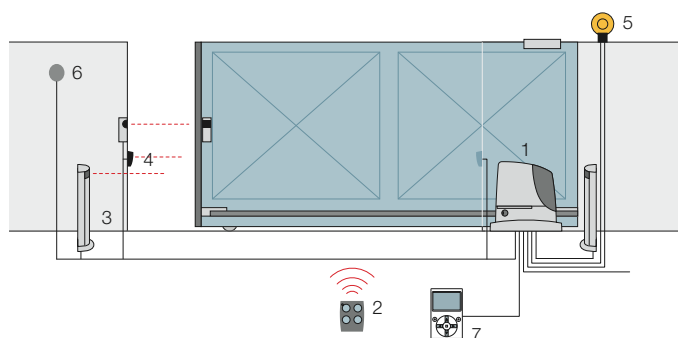

1. Run 2. Transmitter 3. Photocells mounted on posts 4. Photocells 5. Flashing light 6. Digital or key switches 7. O-View* multifunction display.

*Optional connection to Opera system.



For sliding gates weighing up to 3500 kg.
Ideal for industrial use.
Irreversible electromechanical 400 Vac gear motor with built-in Mindy A500 control unit.

Powerful: 550 W absorbed output and a peak thrust of over 400 Nm.

Functionality and safety: programmable, electronic brake which prevents gate inertia; self-ventilated motor to increase the working cycles; optional PIU card to increase the basic functions; possibility of slowdown.

Maximum durability and silence: bronze and metal gears.


Advanced: Tub meets all requirements in terms of control, thanks to the functions which can be selected by means of dipswitches.

Practical: the lever release enables safe and simple operation.

Technical specifications

Code	TUB3500
Electrical data	
Power supply (Vac 50 Hz)	400
Absorption (A)	1.65
Power (W)	550
Built-in capacitor (µF)	-
Performance data	
Speed (m/s)	0.17
Force (N)	7740
Work cycle (cycles/hour)	200
Dimensional and general data	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	480x240x580 h
Weight (kg)	60

Installation diagram

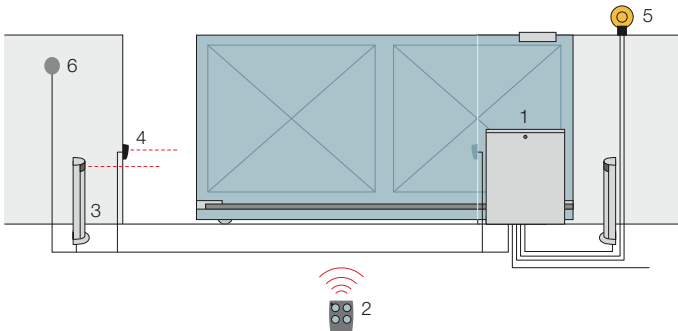

www.DigiDsc.com
021-44929013
09123036082

1. Tub 2. Transmitter 3. Photocells mounted on posts 4. Photocells 5. Flashing light 6. Digital or key switches.

Nice To complete your automation:



Accessories for Robus

RobusKit 350

Code	Description	Pc/Pack
RBA2	Spare control unit for RBKCE	
PS124	24 V battery with integrated battery charger	1
CM-B	Pawl with two metal release keys	
LO5	Plastic rack 26x26x500 mm, for gates weighing up to 400 kg	10
ROA6	M4 25x20x1000 mm slotted nylon rack with metal insert for gates weighing up to 500 kg	10
ROA7	M4 rack, zinc coated, 22x22x1000 mm	10
ROA8	M4 rack, 30x8x1000 mm, zinc coated with spacers and screws	10

RobusKit 400

Code	Description	Pc/Pack
RBA3	Spare control unit for RB400, RB600/600P, RB1000/1000P and RUN1500/1500P	1
PS124	24 V battery with integrated battery charger	1
RBA1	Inductive limit switch	1
ROA6	M4 25x20x1000 mm slotted nylon rack with metal insert for gates weighing up to 500 kg	10
ROA7	M4 rack, zinc coated, 22x22x1000 mm	10
ROA8	M4 rack, 30x8x1000 mm, zinc coated with spacers and screws	10

RobusKit 600

Code	Description	Pc/Pack
RBA3	Spare control unit for RB400, RB600/600P, RB1000/1000P and RUN1500/1500P	1
PS124	24 V battery with integrated battery charger	1
RBA1	Inductive limit switch	1
ROA7	M4 rack, zinc coated, 22x22x1000 mm	10
ROA8	M4 rack, 30x8x1000 mm, zinc coated with spacers and screws	10

Robus 600/1000

Code	Description	Pc/Pack
RBA3	Spare control unit for RB400, RB600/600P, RB1000/1000P and RUN1500/1500P	1
PS124	24 V battery with integrated battery charger	1
RBA1	Inductive limit switch	1
ROA7	M4 rack, zinc coated, 22x22x1000 mm	10
ROA8	M4 rack, 30x8x1000 mm, zinc coated with spacers and screws	10
TS	Signboard	1

Accessories for Road



Code	Description	Pc/Pack
RBA4	Spare control unit for RDKCE	
CM-B	Pawl with two metal release keys	
LO5	Plastic rack 26x26x500 mm, for gates weighing up to 400 kg	10
ROA6	M4 25x20x1000 mm slotted nylon rack with metal insert for gates weighing up to 500 kg	10
ROA7	M4 rack, zinc coated, 22x22x1000 mm	10
ROA8	M4 rack, 30x8x1000 mm, zinc coated with spacers and screws	10



Accessories for Run

Run 1500

Code	Description	Pc/Pack
RBA3	Spare control unit for RB400, RB600/600P, RB1000/1000P and RUN1500/1500P	1
PS124	24 V battery with integrated battery charger	1
RBA1	Inductive limit switch	1
ROA7	M4 rack, zinc coated, 22x22x1000 mm	10
ROA8	M4 rack, 30x8x1000 mm, zinc coated with spacers and screws	10
ROA81	M6 rack, 30x30x1000 mm, zinc coated, preset for screws and spacers, to be coupled with RUA12	1
RUA12	12-teeth pinion, module 6, to be coupled with rack ROA81. The Run automation is supplied with a module 4 pinion to be used with the standard racks ROA7 and ROA8	1
TS	Signboard	1

Run 1800/2500

Code	Description	Pc/Pack
RUA1	Spare control unit for RUN1800/1800P and RUN2500/2500P	1
RUA2	Spare control unit for RUN2500I	1
RUA3	Spare inverter for RUN2500I	1
ROA7	M4 rack, zinc coated, 22x22x1000 mm	10
ROA8	M4 rack, 30x8x1000 mm, zinc coated with spacers and screws	10
ROA81	M6 rack, 30x30x1000 mm, zinc coated, preset for screws and spacers, to be coupled with RUA12	1
RUA12	12-teeth pinion, module 6, to be coupled with rack ROA81. The Run automation is supplied with a module 4 pinion to be used with the standard racks ROA7 and ROA8	1
TS	Signboard	1



Accessories for Tub

Code	Description	Pc/Pack
A500	Spare control unit	1
PIU	Expansion card for control unit	1
ROA81	M6 rack, 30x30x1000 mm, zinc coated, preset for screws and spacers	1
TS	Signboard	1

www.DigiDsc.com
 021-44929013
 09123036082



Racks

Code	Description	Pc/Pack
LO5	Plastic rack 26x26x500 mm, for gates weighing up to 400 kg	10
ROA6	M4 25x20x1000 mm slotted nylon rack with metal insert for gates weighing up to 500 kg	10
ROA7	M4 rack, zinc coated, 22x22x1000 mm	10
ROA8	M4 rack, 30x8x1000 mm, zinc coated with spacers and screws	10
ROA81	M6 rack, 30x30x1000 mm, zinc coated, preset for screws and spacers	1

Nice control electronics

www.DigiDsc.com

021-44929013

09123036082

With just a click!

Small, slim and coloured, ideal to carry in your pocket, bag or use as stylish key rings, or table-top or wall-mounted, for control the entire home at your fingertips!



NiceWay: many solutions, just one gesture.



Table shockproof holder.



Wall or table shockproof holder.



Squared wall plate.



Rectangular wall plate.



Module holder cover.


Transmitters



One
433.92 MHz and 868.46 MHz transmitters, with management of Identity Codes and Certificates. Compatible with Opera System. 1, 2, 4 and 9 channel versions.



FloR
Radio-control 433.92 MHz rolling code system with self-learning function. 1, 2 and 4 channels versions.



Very
Miniaturised radio control 433.92 MHz rolling code system with self-learning function or programmable code.



Smilo
Radio-controls 433.92 MHz rolling code system with self-learning function. 2 and 4 channel versions.

Tag system



Disappearing inside standard wall mounted plates and suitable to confined spaces, are ideal for restorations and upgrades of existing systems to control home automations, lighting points and all loads up to 500 W not directly accessible from cable controls.

All without the need to replace the existing system or involve building work!

Control units



Moonclever and Mindy

Range of Nice control units: all kinds of models for all kinds of automations, from the simplest to the most sophisticated, which offer exclusive, fully-developed functions by means of magnetic encoders.

New Moonclever **MC824H**, the innovative control unit with magnetic encoder for motors 24 Vdc, equipped with BlueBUS technology and designed for operation with the systems Solemyo and Opera.

Accessories



Moon

Range of digital and key switches, proximity sensor reader for transponder card and synchronised photocells with a 10° receiving angle, also available in a 30° version adjustable, with BlueBUS technology.



F210

Synchronised photocells adjustable at 210° horizontally, with relay output or BlueBUS technology.



FT210

Optical device adjustable at 210° horizontally and 30° vertically. With relay output or BlueBUS technology.



Moonlight and Wallyght

Modular flashing signal light and multi-function Led indicator.

www.DigiDsc.com

021-44929013

09123036082

Nice

System Opera



Nice Opera simplifies the installer's work, making for easier programming, and enabling access to all control panel parameters to adapt the system to all requirements. No specific procedures needed for each product: single programming mode with intuitive menus, with no need to consult instructions. Thanks to the GSM module, diagnostics can be performed remotely and the automation can be monitored constantly avoiding costly inspections on site with significant savings in time.

The BUS T4 technology enables the creation of a network of devices, connecting compatible control units between them, and centralising control via O-View. By interfacing the system with the PC, you can control a complex automation system such as those found in densely frequented buildings (hospitals, hotels, companies, etc.).

Management of the One series transmitters, even in large numbers, **is now fast and simple** with the option for remote control, and the creation of a database thanks to the software supplied.



One
Transmitters
and receivers




O-View
Multifunction
display



O-Box
Connection interface



OX4T
Universal
receiver



**O-View_O-Box
Software Suite**
Communication
software for PC
and PDA



Certified quality.

Safety, quality, reliability and durability are priorities for Nice. All Nice Products in fact comply with the provisions of the **European Directives** governing construction.

Service

Dealers who offer Nice products to their customers believe in the value of quality; providing service that satisfies all the needs and wishes of customers, before and after sales, is a duty. Contact a Nice specialist with complete trust!



Nice cares for the environment.
Using natural paper it avoids excessive
use of raw materials and forest exploitation.
Waste is reduced, energy is saved
and climate quality is improved.

www.DigiDsc.com
021-44929013
09123036082

Nice

Nice SpA
Oderzo TV Italia
Ph. +39.0422.85.38.38
Fax +39.0422.85.35.85
info@niceforyou.com

Find out more about Nice
products and services on the website:
www.niceforyou.com