

Simple



www.DigiDsc.com
021-44929013
09123036082



Coded key inhibiting the board and preventing any involuntary restart of the gearmotor

AUTOMATIC BARRIER FOR MOTOR VEHICLES

- wall installation system, rather than floor

Release with a customised key.

Code	Name	Version	Voltage	Max. beam length
6130021	Simple C	Gearmotor with integrated Lynx 05 control board	24V	4 m.*

*Useful length: 200 mm less than the nominal length.

OPERATOR DIMENSIONS



Technical Specifications	Simple
Power supply (V)	230
Electric motor (V)	24
Nominal motor power (W)	48
Current (A)	0,35
Max. torque at 24Vdc (Nm)	130
Opening/closing nominal time (sec) ¹	3
Frequency of use at 20 °C	300 cycles per day
Operating ambient temperature (°C)	-20 +55
Noise (dBA)	>70
Protection class	IP44
Operator weight (Kg)	20 (38 Simple Kit)

CONTROL BOARDS

Lynx 05

Page 74

www.DigiDsc.com
021-44929013
09123036082

1 - Opening time for correctly executed installations at the dimensions indicated in the installation instructions and without slow-downs.

MANY FEATURES THAT MAKE THE DIFFERENCE.

Simple offers higher functionality while reducing installation time.

www.DigiDsc.com
021-44929013
09123036082



EASY INSTALLATION

The balance spring does not require adjustment.
The electronic control board is contained in an ergonomic and easy-access housing.



INTEGRATED PHOTOCELL SUPPORT

The product design features a practical integrated housing for positioning the photocell in line with the bar.



INTEGRATED FLASHING LAMP

The innovative design generates 2 beams of light for movement signalling.



EASY RELEASE

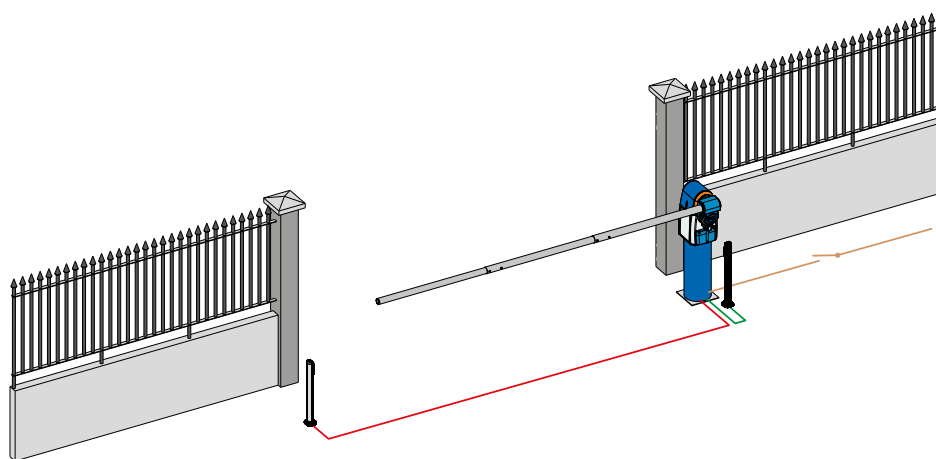
An innovative protection system with personalised key to disable the board and avoid accidental restarting of the reduction unit.



OBSTACLE DETECTING SYSTEM

Simple features a safety system that immediately detects the presence of an obstacle and reverses bar motion.

www.DigiDsc.com
021-44929013
09123036082


www.DigiDsc.com

021-44929013

09123036082

■ Line3x1,5 mm²■ TX photocells2x0,5 mm²■ RX photocells4x0,5 mm²

TYPICAL INSTALLATION EXAMPLE

Q.ty	Material description	Part number
1	SIMPLE C barrier body with incorporated LYNX 05 control board	6130021
1	Base kit	6100192
1	Pocket for beam, diameter 50	6100194
1	Beam diameter 50, length 4.00 m	6100197
1	RQFZ 433 MHz Frequency Module	6100145
1	Four-channels transmitter ECHO TX4 RC	6100334

Material to add in order to get the configuration as per Wiring Diagram

Q.ty	Material description	Part number
1	VEGA Photocells	6100147
2	Column for photocell	6100149
2	Foundation plate for column	6100150

ACCESSORIES



With recharging board.

Code **6100144**

WALL BRACKET KIT

Code **6100193**

BASE KIT

Code **6100192**

Pocket 50 mm for 4 m beam.

6100227

BEAM

Ø 50 - 4 m.

Code **6100194**Code **6100197**Code **6100145**

868 MHz



6 stickers with Genius brand.

Code **6100201**

For Simple beam with lenght shorter than the standard.

Beam type	Standard L. m.	Minimum L. m.
fixed beam	4	2,80

Code **6100200**
www.DigiDsc.com

021-44929013

09123036082



This document was created with the Win2PDF "print to PDF" printer available at
<http://www.win2pdf.com>

This version of Win2PDF 10 is for evaluation and non-commercial use only.

This page will not be added after purchasing Win2PDF.

<http://www.win2pdf.com/purchase/>